



**Advanced Card Systems Ltd.**  
Card & Reader Technologies

# APG8201-B2



Technical Specifications v1.00



## Table of Contents

1.0.	Introduction .....	3
2.0.	Features .....	4
3.0.	Typical Applications.....	5
4.0.	Technical Specifications.....	6



## 1.0. Introduction

As technology becomes more sophisticated, fraud-related incidents in banking and identification sector becomes more prevalent. These occurrences generate billions of dollars worth of losses and bring distress among cardholders. Certain security measures and systems are created specifically to protect cardholders from frauds, which makes the APG8201-B2 a reliable tool to fight these occurrences.

The APG8201-B2 is a portable, low-cost, and hand-held smart card device which supports Secure PIN Entry (SPE) to assure safe PIN entry and PIN change while connected to a personal computer to perform various authentication applications. The PIN is securely entered on the device rather than the vulnerable personal computer or workstation, hence eliminating the possibility of a middleman attack in getting hold of the card PIN.





## 2.0. Features

- USB Full Speed Interface
- Plug and Play – CCID support brings utmost mobility
- USB Type A Connector
- Smart Card Reader:
  - Supports full-sized microprocessor cards (T=0, T=1 Protocols)
  - Supports ISO 7816 Class A cards
  - Allows semi-insertion of cards
  - Short Circuit Protection
- Application Programming Interface:
  - Supports PC/SC
  - Supports SPE
  - Supports PPS (Protocols and Parameters Selection)
- Built-in Peripherals:
  - Dot Matrix LCD
  - LCD Resolution: 96 × 16 pixels
  - LCD Number of characters: 16 characters × 2 lines
  - Monotone buzzer
  - Durable tactile keypad with 20 silicone rubber keys
  - Key symbol on LCD to recognize SPE mode
- Supports Android™ 3.1 and later<sup>1</sup>
- Compliant with the following standards:
  - ISO 7816
  - PC/SC
  - PC/SC 2.01 Part 10 – Secure PIN Entry
  - CCID
  - CE
  - FCC
  - RoHS 2
  - Microsoft® WHQL

---


<sup>1</sup> Uses an ACS-defined Android Library



### **3.0. Typical Applications**

- e-Government
- e-Banking and e-Payment
- e-Healthcare
- Transportation
- Loyalty Program

## 4.0. Technical Specifications

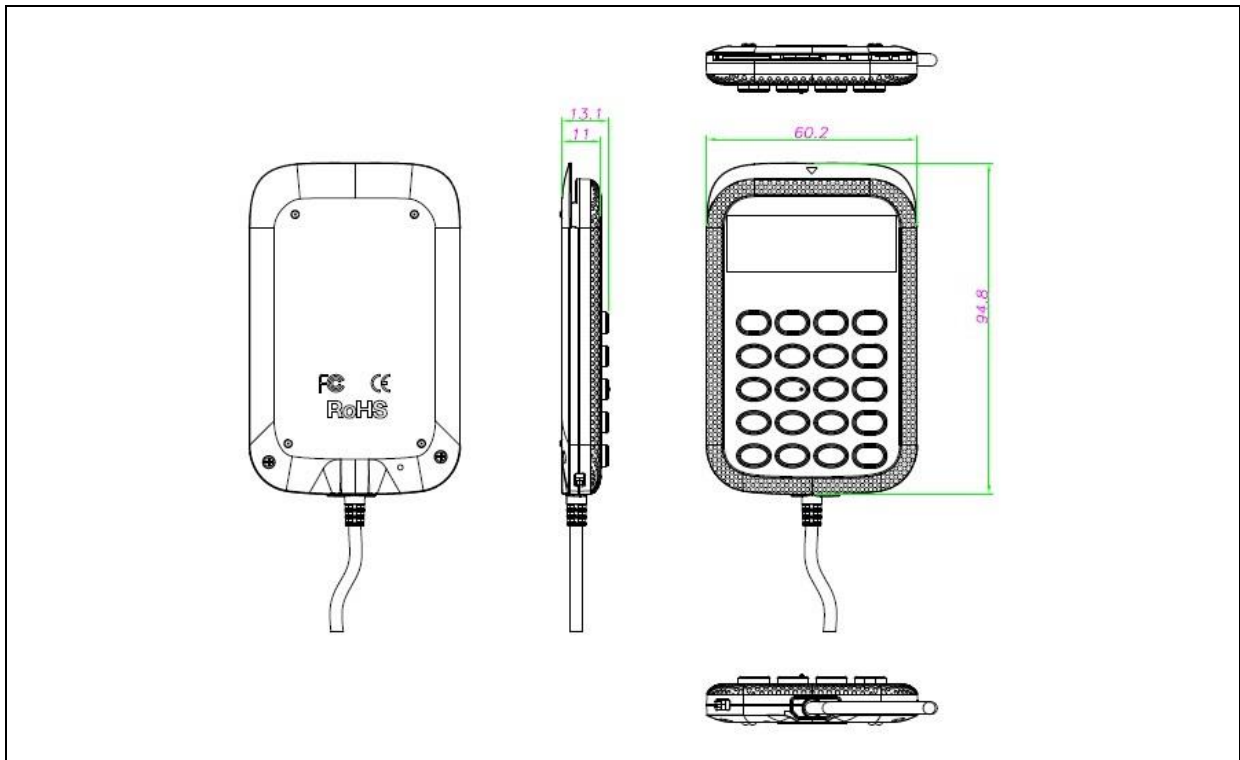

### Physical Characteristics

Dimensions ..... 95 mm (L) × 60 mm (W) × 13 mm (H)  
 Weight ..... 98 g (± 5 g allowance for cable)  
 Color ..... Black

### USB Host Interface

Protocol ..... USB CCID  
 Connector Type ..... Standard Type A  
 Power Source ..... From USB Port  
 Speed ..... USB Full Speed (12 Mbps)  
 Supply Voltage ..... 5 V  
 Supply Current ..... Max. 50 mA  
 Cable Length ..... 1.5 m, Fixed

### Contact Smart Card Interface

Number of Slot ..... 1 Full-sized Card Slot  
 Standard ..... ISO 7816 Class A (5 V)  
 Protocol ..... T=0; T=1  
 Supply Current ..... Max. 50 mA  
 Smart Card Read/Write Speed ..... 1.743 Kbps – 250 Kbps  
 Short Circuit Protection ..... (+5) V/GND on all pins  
 Clock Frequency ..... 2 MHz  
 Card Connector Type ..... ICC Slot 1: Contact  
 Card Insertion Cycles ..... Min. 100,000

### Built-in Peripherals

LCD ..... Dot Matrix LCD  
 ..... Resolution: 96 pixels × 16 pixels  
 ..... Number of characters: 16 characters × 2 lines  
 Buzzer ..... Monotone  
 Keypad ..... 20 keys

### Application Programming Interface

PC-linked Mode ..... PC/SC

### Operating Conditions

Temperature ..... 0 °C – 50 °C  
 Humidity ..... Max. 90% (non-condensing)  
 MTBF ..... 60,000 hrs



**Certifications/Compliance**

ISO 7816, USB Full Speed, PC/SC, PC/SC 2.0 Part 10 (SPE), CCID, CE, FCC, RoHS 2, Microsoft® WHQL

**Device Driver Operating System Support**

Windows® 2000, Windows® XP, Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10  
Windows® Server 2003, Windows® Server 2008, Windows® Server 2008 R2, Windows® Server 2012, Windows® Server 2012 R2  
Linux®, Mac OS®, Android™ 3.1 and later



Android is a trademark of Google LLC.  
EMV is a registered trademark of EMVCo LLC in the United States and other countries.  
Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.  
Mac OS is a trademark of Apple Inc., registered in the U.S. and other countries.  
Microsoft, Windows and Windows Vista are registered trademarks of Microsoft Corporation in the United States and/or other countries.